


## PHOTON – Massima pendenza consentita

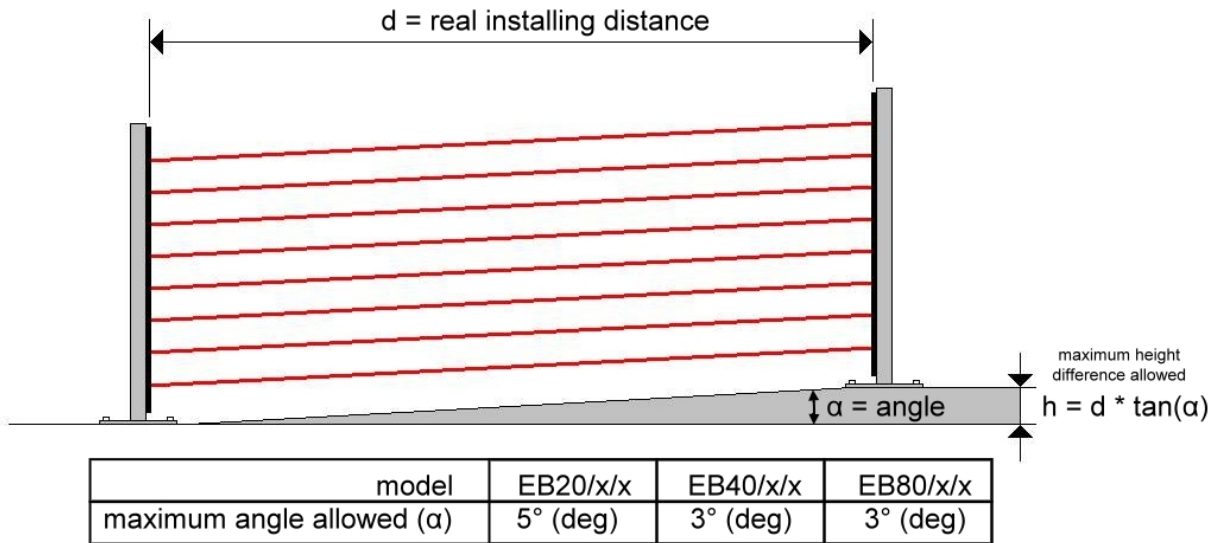

Higher height differences can be overcome by tilting the supporting poles or by changing the mounting height of one side of the barrier.

## PHOTON – Massima differenza di altezza

distanza d [metri]	dislivello h [metri]	
	EB20	EB40/EB80
10	0,87	0,52
11	0,96	0,58
12	1,05	0,63
13	1,14	0,68
14	1,22	0,73
15	1,31	0,79
16	1,40	0,84
17	1,49	0,89
18	1,57	0,94
19	1,66	1,00
20	1,75	1,05
21	1,84	1,10
22	1,92	1,15
23	2,01	1,21
24	2,10	1,26
25	2,19	1,31

distanza d [metri]	dislivello h [metri]
	EB40/EB80
26	1,36
27	1,42
28	1,47
29	1,52
30	1,57
31	1,62
32	1,68
33	1,73
34	1,78
35	1,83
36	1,89
37	1,94
38	1,99
39	2,04
40	2,10
41	2,15
42	2,20
43	2,25
44	2,31
45	2,36
46	2,41
47	2,46
48	2,52
49	2,57
50	2,62

distanza d [metri]	dislivello h [metri]
	EB80
51	2,67
52	2,73
53	2,78
54	2,83
55	2,88
56	2,93
57	2,99
58	3,04
59	3,09
60	3,14
61	3,20
62	3,25
63	3,30
64	3,35
65	3,41
66	3,46
67	3,51
68	3,56
69	3,62
70	3,67
71	3,72
72	3,77
73	3,83
74	3,88
75	3,93
76	3,98
77	4,04
78	4,09
79	4,14
80	4,19